The Utah Teapot in CONV Geometry: Nodes on the Surface, Rays by Transport

Anonymous

Abstract—We rebuild the Utah Teapot from points that lie on its own surface. The representation is a lattice of nodes reconstructed by Compact Ordered Nodal Variation (CONV) with ledger-free admission. Three additions make it a geometry and not only an image filter. Declared seams with cubic-exact one-sided stencils let the lattice reproduce bicubic Bézier patches exactly: with four node intervals per patch, 560 on-surface nodes reproduce the 28 original patches to 2×10^{-15}. A symmetric bubble limiter replaces the standard one, which is discontinuous in the data and can open cracks in a surface; the new limiter is continuous and keeps the variation bound. And because a CONV cell depends on a fixed block of nodes, the surface has a pointwise evaluator with exact derivatives. We render it by correspondence transport, which sends a lattice of known parameters forward to the screen and lets each pixel correct a prediction with a Newton step; it is 1.6 to 2.0 times faster than a per-ray tracer of the same surface and agrees with a fine reference on 99.9% of surface pixels. The representation needs no patches, control points, degrees or knots, only points on a surface, so later versions enter the same way: the 2026 Utah Teapot is rebuilt from 9 by 9 samples of each of its surfaces, interior included. We then measure against the defects that the later teapots were made to fix. A node lattice makes the body 233 times rounder with the same node count and renders without a mesh. Taken patch by patch, the 2026 shape keeps its normals to 0.11° across joints but not its curvature continuity. Taken as whole sheets it does better: the body with its interior is one lattice, the lid another, with rows placed by a piecewise projective warp whose density is set by CONV's own error, and the mean relative curvature jump along the profile falls from 0.16 to 0.003. The handle and spout are joined to the body by blends that interpolate between the two surfaces. These joins are ours, not the 2026 model's chamfers, and we report where they are rough. Given the same nodes on targets native to no method, CONV needs as few as the globally solved C^2 spline and a half to a quarter of what a local bicubic needs; the whole 2026 teapot is 3104 nodes. Finally the surface can be baked: sampled once to vertices chosen by its own error, drawn by a CPU rasterizer with no evaluation per frame, and lit from a texture that the ray tracer paints, with reflections that follow the camera taken from emitters and not traced. The same mesh seeds the ray tracer, which then needs about one surface evaluation per pixel.

Index Terms—Utah Teapot, interpolating surface, variation diminishing, Bézier patch, ray tracing parametric surfaces, correspondence transport.

I. Introduction

The Utah Teapot was modelled by Martin Newell in 1974–75 as 28 bicubic Bézier patches and scaled to its familiar proportions by Jim Blinn in 1976 [1], [2], [3], [4]. Its control points mostly lie off the surface: a Bézier patch passes through only four of its sixteen. Every later version of the model addressed something that the original patches leave open. Crow added a bottom. Driskill made the body round, trimmed the handle and spout to the body and added an interior. Fish improved the interior. Yuksel's 2026 version adds chamfers, a lighter interior, texture layouts and curvature continuity for smooth reflections [5], [6].

This paper puts the teapot in a representation whose every control value is a point of the surface. CONV [8] interpolates samples on a regular lattice by a piecewise quintic whose derivative cannot change sign more often than the samples do. It was built for images. Used for positions, it gives a surface through a lattice of nodes, and a node can be moved, measured, textured or collided with as the surface point it is.

The contributions are these.

1) Seamed CONV lattices (Section III). A seam cuts the difference stencils along a node row or column. With cubic-exact end stencils, a seamed lattice reproduces any piecewise bicubic surface whose patch joints lie on seams, wherever admission leaves the proposal unchanged. For the teapot that is everywhere.
2) A continuous bubble limiter (Section IV). We show that the standard limiter jumps, give a symmetric replacement, and prove that it keeps the variation bound.
3) A pointwise surface evaluator and transport ray tracing (Sections V and X), with a measured comparison against per-ray tracing of the same surface.
4) An account against the later teapots (Section IX): what the representation improves, what it leaves unchanged, and what it does not address.

An engine that implements all of it accompanies the paper and runs in a browser on one CPU thread. Its controls follow the official Utah Teapot page: a choice of version (1975, 1976, 1987, 2026), switches for the handle, spout, lid, body and interior, Blinn's scale, wireframe, texture coordinates per part or per patch, and reflection lines; it adds gloss and a rigid-body drop.

A. For readers of the spline literature

CONV on a lattice is an interpolating surface formulation, and the questions usually put to one have short answers here.

- Interpolation. The surface passes through every node. There are no off-surface controls and no handles.

- Locality and cost. A cell depends on the six samples around it in each direction (eight next to a seam). Every step is closed form, with constant work per cell and no global solve.
- Precision. Linear data are reproduced exactly, so straight pieces need no special constraint. With seams, cubics are reproduced exactly (Proposition 1).
- Continuity. C^2 across node lines wherever the limiter is inactive; C^0 across a seam, which is how a crease is modelled. Curvature is not controlled at a seam, and Section IX measures what that costs.
- Shape. The derivative along a line changes sign no more often than the samples do. Overshoot next to a crease or a step is excluded by construction, not by tuning.
- Dependence on the data. Continuous and piecewise affine in the nodes (Theorem 2).
- Spacing. Nodes need not be evenly spaced on the surface. A sheet is a flat lattice warped onto the shape, and its rows may be placed by a projective warp (Section VII); the interpolation is in the lattice index.
- What it lacks. Coordinates are limited separately, so where the limiter acts the surface is not rotation invariant. One lattice has the topology of a disc, a tube or a sphere; a handle needs a join. It is not a subdivision or a convex-hull scheme.

II. CONV Lines

We restate what is needed from [8]. For samples y_i on a line, with secants $\delta_i = y_{i+1} - y_i$, each node receives a scaled jet (m_i, q_i) from a difference stencil. The cell $[i, i+1]$ gets five raw currents, the differences of six quintic Bézier controls:

$$\begin{aligned} a_{i0} &= \tfrac{m_i}{5}, & a_{i1} &= \tfrac{m_i}{5} + \tfrac{q_i}{20}, \\ a_{i4} &= \tfrac{m_{i+1}}{5}, & a_{i3} &= \tfrac{m_{i+1}}{5} - \tfrac{q_{i+1}}{20}, \end{aligned} \tag{1}$$

and $a_{i2} = \delta_i - a_{i0} - a_{i1} - a_{i3} - a_{i4}$. Ledger-free admission clips a_i into a box built from the two neighbouring secants and terminal currents, and restores the cell mass δ_i by one capped common shift. The admitted currents c_i satisfy $\operatorname{var}(c^\flat) \le \operatorname{var}(\delta)$ for any proposal whose cells sum to their secants; the proof in [8] uses nothing else. The cell is then

$$y(i+t) = y_i + \sum_{j=0}^{4} c_{ij}\, \tau_j(t) + \omega_i\, \psi(t), \tag{2}$$

with $\tau_j = \sum_{r>j} B_r^5$ and the odd bubble $\psi(t) = [t(1-t)]^3(2t-1)$. In the interior of a line the jets are the fourth-order centred stencils, and a cell depends on the six samples $y_{i-2}, \dots, y_{i+3}$ only.

III. Seams and Cubic Precision

A first attempt to put the teapot on a plain CONV lattice fails near its creases and patch joints. With four node intervals per patch the worst deviation from the Bézier surface is 5.9×10^{-2} on a body 4.0 wide, against 1.05×10^{-1} for the same nodes joined bilinearly; next to the crease of a flat bottom cap, CONV is worse than linear. The variation bound holds, and there is no overshoot. The loss is in the jets: a centred stencil that straddles a crease measures a slope that belongs to neither side.

A. Seams

A seam is a node row or column across which no difference stencil may reach. Values remain continuous across it. The two ends of an open line are seams; a closed ring without seams is periodic. A node on a seam has two jets, one from each side. For a segment of at least four nodes between seams we use the stencils that are exact for cubics and still fit the six-sample window:

$$\begin{aligned} m_0 &= \tfrac{1}{6}(-11y_0 + 18y_1 - 9y_2 + 2y_3), \\ q_0 &= 2y_0 - 5y_1 + 4y_2 - y_3, \\ m_1 &= \tfrac{1}{6}(-2y_0 - 3y_1 + 6y_2 - y_3), \\ q_1 &= y_0 - 2y_1 + y_2, \end{aligned} \tag{3}$$

with their mirror images at the other end and the centred stencils from the third node on. Admission is unchanged, except that the terminal current a cell sees in its neighbour across a seam, $a_{i-1,4}$ or $a_{i+1,0}$, is now the neighbour's own one-sided value. This is the case for which the knot-exclusivity terms of the box were written; without seams they collapse to the sign of a shared slope. A cell next to a seam depends on $y_{i-3}, \dots, y_{i+4}$.

Proposition 1 (Cubic precision). Let a segment between two seams have at least four nodes, and let its samples be those of a cubic polynomial at equally spaced parameters. If admission leaves every raw current of the segment unchanged, the CONV line equals that cubic on the segment, with zero bubble.

Proof. The stencils (3) and the centred stencils return the first and second derivatives of a cubic exactly. The raw quintic of each cell is then the quintic Hermite interpolant of exact two-jets of a cubic at both ends, which is that cubic. With $c_i = a_i$ the second term of the bubble fit vanishes, and its first term is a fifth difference, which vanishes on a cubic. □

Theorem 1 (Exact Bézier reproduction). Let a surface be a grid of bicubic Bézier patches, sampled at $n \ge 3$ equal parameter intervals per patch in each direction, with seams on every patch boundary. If admission is inactive in both factors, the CONV surface of Section V equals the Bézier surface.

Proof. Along a node row inside one patch the samples are those of a cubic, so by Proposition 1 every row line equals the surface along that row at every u. The second factor then interpolates, at fixed u, values that are samples of the cubic $v \mapsto S(u, v)$ within the patch. □

The hypothesis is checkable, and for the teapot it holds. Table I gives the measured deviation at eight samples per node interval over all four parts. From four intervals per patch on, the teapot's own geometry passes admission

untouched and the two surfaces agree to rounding. At three intervals a few cells are clipped. At two there are too few nodes for a cubic stencil.

TABLE I
Deviation from the Bézier teapot (body 4.0 wide)

		Seamed, cubic ends		Seamless	
n	Nodes	max	rms	max	rms
2	152	2.3×10^{-1}	5.4×10^{-2}	2.1×10^{-1}	4.8×10^{-2}
3	324	2.9×10^{-5}	1.3×10^{-6}	8.8×10^{-2}	1.7×10^{-2}
4	560	2.3×10^{-15}	4.1×10^{-16}	5.9×10^{-2}	9.5×10^{-3}
6	1224	3.4×10^{-15}	6.2×10^{-16}	3.5×10^{-2}	4.7×10^{-3}
8	2144	2.4×10^{-15}	4.1×10^{-16}	2.5×10^{-2}	2.9×10^{-3}

The node count is not smaller than the control-point count; 28 patches have 448 control points and the exact lattice has 560 nodes, 64 of them on a flat bottom cap that is not one of the 28 patches. What changes is where they are. All 560 are points of the teapot.

IV. A Continuous Bubble

The bubble amplitude ω_i is fitted and then limited so that the degree-six Bernstein coefficients of the cell's derivative keep their signs. Writing d_2, d_3, d_4 for the three coefficients the bubble touches, the enriched ones are $d_2 - \omega/5$, $d_3 + 2\omega/5$ and $d_4 - \omega/5$. The standard limiter [8] lets each keep its sign one-sidedly: for $d_2 > 0$ it requires only $\omega \le 5d_2$.

Proposition 2 (The standard limiter is discontinuous). Fix a fitted amplitude $\widehat{\omega} > 0$ and let d_2 pass through zero with d_3, d_4 fixed and nonzero. For $d_2 \downarrow 0$ the admitted amplitude tends to 0. For $d_2 \uparrow 0$ the constraint from d_2 is a lower bound that tends to 0, and the admitted amplitude tends to $\min\{\widehat{\omega}, U\}$, where $U > 0$ is the upper bound from the other two coefficients whenever one exists.

On a line this is a jump in the data-to-value map. On a surface it is a crack: the second factor's inputs vary continuously with u, and where one of its coefficients changes sign the surface position jumps. The defect was observed in an earlier cloth experiment; here is its cause and a cure.

Theorem 2 (Symmetric limiter). Let

$$M_i = \min\{5|d_{i2}|,\ \tfrac{5}{2}|d_{i3}|,\ 5|d_{i4}|\},$$
$$\omega_i = \max\{-M_i, \min\{M_i, \widehat{\omega}_i\}\}. \tag{4}$$

Then ω_i is a continuous piecewise-affine function of the cell's samples, no enriched coefficient changes sign, and the variation bound of [8] holds unchanged. Wherever $|\widehat{\omega}_i| \le M_i$ the amplitude equals the fitted one, so the leading-error reduction 1681/1950 is retained.

Proof. $|\omega_i| \le M_i$ gives $|\omega_i/5| \le |d_{i2}|$, $|2\omega_i/5| \le |d_{i3}|$ and $|\omega_i/5| \le |d_{i4}|$, so each enriched coefficient is zero or has the sign of the one it replaces. That is the only property of the amplitude used in the variation proof. $\widehat{\omega}_i$ is linear in the samples and the admitted currents, which are continuous and piecewise affine; M_i is a minimum of absolute values of linear forms of them; and a clamp is continuous in its three arguments. □

The symmetric bound is the tighter of the two, since it limits both signs of the amplitude. On resolved smooth data the fit is of fifth order in the spacing and the coefficients of first order, so neither limiter acts and the two agree. Table II measures the difference where it matters: the largest change of position between surface samples one step apart along u, on the teapot body with its nodes displaced by noise of standard deviation 0.08. A continuous surface gives a change proportional to the step. The standard limiter leaves a jump of 1.3×10^{-4} at a step of 10^{-6}, about a hundred times the continuous value.

TABLE II
Largest position change over one parameter step

Bubble	step 10^{-4}	step 10^{-6}
off	1.8×10^{-3}	1.4×10^{-6}
standard	2.0×10^{-3}	1.3×10^{-4}
symmetric	1.9×10^{-3}	1.4×10^{-6}

With the symmetric limiter the whole factor, bubble included, is continuous in the data, and the surface of the next section is watertight within each part.

V. The Surface

A part is a lattice of nodes $P_{kl} \in \mathbb{R}^3$, closed around (u) and open along (v). The surface is the fixed-order composition of two CONV factors, evaluated at a point. For (u, v) in cell (i, j) with local parameters (s, t):

1) for each node row $l = j - 3, \ldots, j + 4$ that exists, evaluate the row's CONV cell i at s, giving $R_l(s)$;
2) admit one CONV cell along v from the window $R_{j-3}, \ldots, R_{j+4}$ and evaluate it at t.

Each coordinate is treated separately in the object's own frame. The admitted currents of step 1 do not depend on s and are compiled once per lattice; step 2 is admitted at every query, because its inputs depend on u. A point costs 24 polynomial evaluations and three admissions. This is exactly the ordered composition of [8], not an approximation of it; the ledger form could not be evaluated this way, since its sign ledger needs the whole line.

Derivatives. Admission is piecewise affine, so forward-mode differentiation through its minima and maxima is exact wherever a derivative exists. We evaluate both steps on dual numbers that carry $\partial/\partial s$ and $\partial/\partial t$ and obtain S_u and S_v with the point. The normal is their cross product.

Regularity. Within a part the surface is continuous (Theorem 2). Where admission and the limiter are inactive it is C^2 across node lines away from seams, because adjacent cells share two-jets and ψ has triple zeros. Across a seam it is C^0 by design.

Invariance. Each factor commutes with translation and with scaling of a coordinate, so an axis-aligned affine map of the nodes maps the surface exactly; Blinn's vertical scaling of Newell's teapot is such a map. Where admission

is inactive the operator is linear and commutes with every affine map. Where it is active, a rotation of the nodes does not in general rotate the surface, since coordinates are admitted separately.

VI. The Teapot

The source is the original data from the Utah Model Repository [7]: 28 patches, without a bottom. They assemble into four parts, each a grid of patches closed around: the body (rim, upper and lower body: four patches around, three along), the lid (knob and lid: four by two), the handle and the spout (two half tubes around, two along). We add an optional flat cap under the body, as Blinn suggested [4]; it meets the body at a 90° crease, which a seam keeps exactly, and the lowest point of the CONV body is the plane itself.

Three lattice styles are provided for this data.

- Exact: seams on every patch boundary, nodes at equal Bézier parameters. This is the 1976 teapot to rounding (Table I).
- Round: as exact along v, but every ring of the body and lid lies on a true circle and is closed without seams.
- Seamless: no seams, the closure of [8]. Smooth across the patch joints, at the deviation of Table I.

A. Other versions, from samples alone

Nothing in Section V asks where the nodes came from. The official page generates meshes of every version, and a mesh vertex of a patch is a point of its surface. We took, for the 2026 version, the 9×9 vertices of each of its 66 untrimmed surfaces at eight intervals per patch, and for the 1987 version the four patches of Crow's round bottom. Symmetry leaves 19 distinct patches of the 66. Each becomes one open lattice with cubic ends. No control point, degree, knot vector or continuity construction of the source model is used or known to us; the samples are not even uniform in the source parameter.

The versions offered are then: 1975, Newell's proportions, which is the 1976 lattice with its heights scaled by 4/3, an exact operation (Section V); 1976; 1987, the 1976 lattice raised by 0.15 with the sampled bottom; and 2026, 5346 nodes on 46 exterior and 20 interior surfaces. Adjacent lattices share their edge samples, and a CONV line along an edge depends on that edge's samples alone, so the lattices meet without gaps: the largest measured gap over 52 joints is 9×10^{-8}, the rounding of the single-precision samples. Fig. 1 shows them.

What is left out is stated plainly. The 2026 model trims the body, handle and spout against each other and adds chamfers at the joins; those surfaces come out of the generator as irregular meshes, not grids, and are not included, so the handle and spout still pass through the wall. The 1992 and 2006 versions, whose difference is in trimmed surfaces and interiors, are not included.

VII. One Sheet per Part, and Joins

The patch decomposition of the previous subsection is inherited from the source, and its seams are where curvature continuity is lost (Section IX). A sheet does not need them. A lattice closed around and open along, with a pole at each end, is a sphere, and that is a bowl with its inside: the body's profile runs from the outer bottom centre up the outside, over the rim, down the inside, to the inner bottom centre. Revolved on true circles it is one sheet. The lid, from the apex of its knob around its edge and back along its underside, is another. The handle is a tube; the spout is a tube that runs out along the outside, around the lip and back down its channel. Four sheets replace 66 patches.

A. Projective row placement

The rim and the foot turn within a few hundredths of a unit; the wall barely turns at all. CONV interpolates in the row index, so what matters is that the profile be a smooth function of that index, not that rows be evenly spaced. We place rows by a piecewise projective warp. Stations $s_0 < \cdots < s_m$ are laid along the profile's arc length, and each is given a wanted spacing h_k, within limits and bounded in its rate of change; how h_k is chosen is the next subsection. Between stations $\sqrt{h}$ is linear. Writing $p = \sqrt{h}$, a span of length d then holds

$$n = \int \frac{ds}{h} = \frac{d}{p_0\, p_1} \tag{5}$$

rows, and the arc length that holds c rows from the span's start is

$$x(c) = \frac{c\, p_0^2}{1 - c\, p_0\, (p_1 - p_0)/d}, \tag{6}$$

a Möbius function of c. A projective map of a uniform grid is exactly a spacing whose square root is linear, so each span is one projective warp and adjacent spans agree in spacing where they meet. One global scale is found by bisection on the row count. A row is placed on each true crease, which is detected from the one-sided tangents of the source curve and receives a seam. The 2026 body has one such crease, of 115° at the rim, and the lid one of 90° at its edge; everything else is seamless.

The source for this is denser than before: 49 points per patch edge along the two meridians, and 17×17 points per patch of the tubes. The earlier 9×9 reconstruction had tangent kinks of up to 1.5° at its own joints, which a sheet fitted to it would inherit.

B. Rows by CONV's own error

Our first choice of h was the profile's radius of curvature. It is a poor one: the 2026 body has three bends of radius about 0.03 (at the foot, the lip and inside the rim) that it under-resolves, while rows pile up at the rim's crease, where the radius measured across the crease is meaninglessly small. The better density comes from the interpolant itself. Through the current rows the meridian is a pair of CONV lines. In each cell we measure its

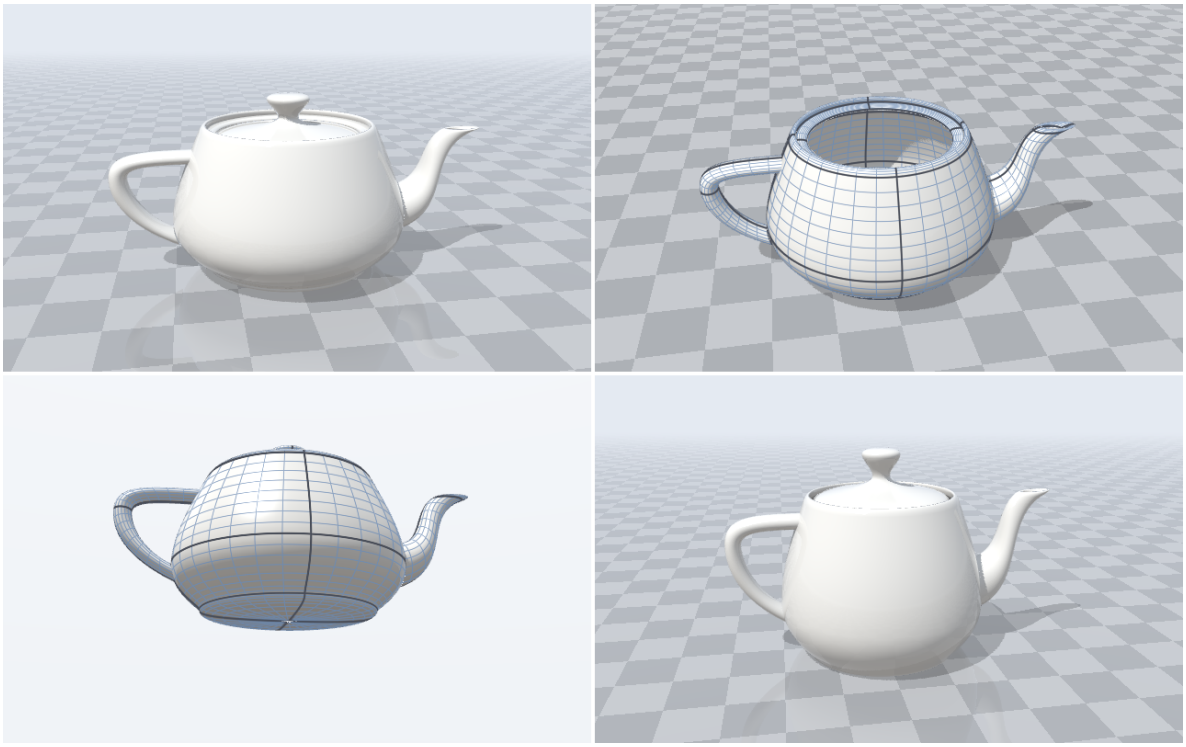


Fig. 1. Versions as node lattices. Top: the 2026 version from surface samples, glazed; the same with the lid removed, showing its interior and the node lines of each 9×9 lattice. Bottom: the 1987 version from below, with Crow's round bottom; the 1975 version in Newell's proportions.

distance e from the source profile and form $g = e/h^4$, which for a fourth-order interpolant estimates how hard the profile is there, independent of the spacing used to measure it. The spacing that makes every cell err alike is $h \propto g^{-1/4}$, the equidistribution rule of de Boor [9]. That h is handed to the projective grading above, the rows are replaced, and the step is repeated eight times with the estimate averaged geometrically between rounds; the plan with the smallest error is kept. The only inputs are the CONV line and the source.

With 16 nodes around, the body's largest distance from its profile falls from 5.8×10^{-3} to 1.0×10^{-3} at 64 rows and from 3.7×10^{-3} to 2.6×10^{-4} at 96, between 6 and 14 times for the same nodes. Rows evenly spaced in arc length are worse again (3.3×10^{-2} at 64 rows).

C. Measurements

Table III gives, for the body and lid sheets, the distance of the sheet's meridian from the source profile and the continuity along it at every row that is not a crease, by one-sided finite differences.

TABLE III
Unified sheets of the 2026 teapot

Sheet	Lattice	Distance max	Distance rms	Tangent turn max	Curv. jump mean rel.
Body	12×73	6.6×10^{-4}	1.8×10^{-4}	$0.04°$	0.003
Lid	12×55	3.1×10^{-4}	7.6×10^{-5}	$0.26°$	0.001

Against the per-patch lattices of Table VIII, the mean relative curvature jump falls from 0.16 to 0.003 on the body and 0.001 on the lid, with a third of the nodes for those two parts (1536 against 4536). It is not zero, and the row count is a real parameter: with 48 rows the body strays by 3.0×10^{-3} and its normal by up to $21°$ inside the three tight bends, which then hold too few rows to turn through. Twelve nodes around are enough for the round parts; the tubes, whose sections are not circles, take sixteen.

D. Joins as interpolants

Where a tube passes through the body the two surfaces meet along a closed curve Γ. The join is a third surface that interpolates between them. For a point Γ_k of the curve and $\tau \in [0,1]$ across a band of width w,

$$C(k,\tau) = \big(1-\beta(\tau)\big)\,A_k\big(w(1-\tau)\big) + \beta(\tau)\,B_k(w\tau), \quad (7)$$

where $A_k(d)$ is the point of the body at distance d from Γ_k, away from the tube, $B_k(d)$ the point of the tube at distance d from Γ_k, away from the body, and $\beta(\tau) = \tau^3(10 - 15\tau + 6\tau^2)$. At $\tau = 0$ the join is the body and at $\tau = 1$ it is the tube; since β' and β'' vanish at both ends, the curve $\tau \mapsto C(k,\tau)$ leaves the body and arrives on the tube with their tangent and curvature. On Γ the two surfaces are in unison, so the convex combination is taken between points that approach each other. The buried part of the tube and the covered part of the body are trimmed in their parameter domains, by a cut around the tube and a polygon on the body, and the join itself is sampled as a small lattice, 16 by 9 nodes, like any other

part. The intersection curve is found by bisection along each column of the tube against the body's radius at that height, which the body's being a surface of revolution makes a one-dimensional search.

Four joins result: the two ends of the handle, the base of the spout, and the spout's channel where it opens into the interior. Where a tube's end only touches the body, as at the lower end of the handle, the join starts at the end of the tube. Table IV measures the band's edge on the body against the body itself. Each join turns the normal through about 90° across its band, which is the crease it replaces.

TABLE IV
Joins: the band's edge against the body

Join	Gap max	Normal mismatch max
Handle, upper	3.7×10^{-4}	1.6°
Handle, lower	1.4×10^{-4}	4.2°
Spout base	4.6×10^{-4}	1.3°
Spout channel, interior	4.2×10^{-4}	17.1°

The exterior joins agree with the body to a few degrees; the mismatch comes from sampling (7) at only sixteen columns around. The interior join is rough and we would not present it as finished. Fig. 2 shows reflection lines running from the body through the join onto the spout without a break.

These joins are not the chamfers of the 2026 model. Their widths (0.11, 0.14 and 0.07) were chosen by eye, and their shape near the handle and spout differs from the official one. What they show is that a join needs no new kind of surface: it is the same blend between two continuous surfaces that CONV already uses between its two factor orders.

The unified teapot has 3104 nodes in eight lattices, against 5346 in 66, and every sheet lies within 7.5×10^{-4} of its source. (Placed by radius of curvature the same sheets took 5392 nodes and strayed by up to 1.1×10^{-2}.) A 640×400 frame of it takes 44 ms by transport and 56 ms per ray without edge samples.

VIII. How Many Nodes

This section compares node counts. Against the 1976 Bézier patches a CONV lattice is about equal: the patches have about 300 control points, a seamed lattice of 324 nodes is within 2.9×10^{-5} of them, and exact reproduction takes 560. That target is native to Bézier patches. The comparison below gives every method the same points on a surface that is native to none of them. We use three targets: an analytic surface of revolution with a trigonometric profile, half a torus, and the 2026 body with its interior, rows placed as above; and five methods: the nodes joined bilinearly; the Catmull–Rom bicubic [10]; the uniform bicubic B-spline with the nodes as its control points, which on a regular grid is also the Catmull–Clark limit surface [11] of the node mesh; the same B-spline solved to pass through the nodes, which is the C^2 interpolating spline and needs a global solve along every line; and CONV. Every method is cut at the body's crease.

TABLE V
Fewest nodes that hold a tolerance on the distance from the target (model units) and on the normal (degrees). A dash: not reached by 6192 nodes (9264 on the body)

	Distance ≤			Normal ≤	
Method	10^{-2}	10^{-3}	10^{-4}	1°	0.1°
Analytic revolution					
Facets	1200	–	–	–	–
Catmull–Rom	156	528	2080	396	2328
B-spline, nodes as control	1584	–	–	–	–
Spline through nodes (global)	78	300	784	150	588
CONV	78	300	784	150	588
Half torus					
Facets	400	4656	–	–	–
Catmull–Rom	54	156	544	108	408
B-spline, nodes as control	600	–	–	582	–
Spline through nodes (global)	42	72	272	54	204
CONV	42	72	204	54	156
2026 body with interior					
Facets	4656	–	–	–	–
Catmull–Rom	588	2328	9264	–	–
B-spline, nodes as control	4656	–	–	–	–
Spline through nodes (global)	294	1040	4632	2316	–
CONV	392	1164	3088	2316	–

Table V is read from a grid of lattice sizes, so its entries are steps of that grid. On the smooth targets CONV needs exactly what the C^2 spline needs, or less, and a half to a quarter of what Catmull–Rom needs; facets and the raw control mesh are one to two orders behind or never arrive. The spline reaches this by solving a banded system along every line, so each node influences the whole surface; CONV reaches it from the 6 by 6 nodes around a cell. On the body all the cubic methods are within a grid step of one another, because the count is set by the three tight bends and not by the method. CONV is the only one of the five whose normal is not exactly continuous where its limiter acts: at the coarsest sizes it shows kinks of a few degrees, which vanish as the lattice resolves the shape (none above 0.03° on the torus at 272 nodes). The result is equality with the C^2 interpolating spline at local cost. CONV does not need fewer nodes than it.

IX. Against the Later Teapots

Each later version fixed a named defect. Table VI lists what a node lattice does about each; the measurements follow.

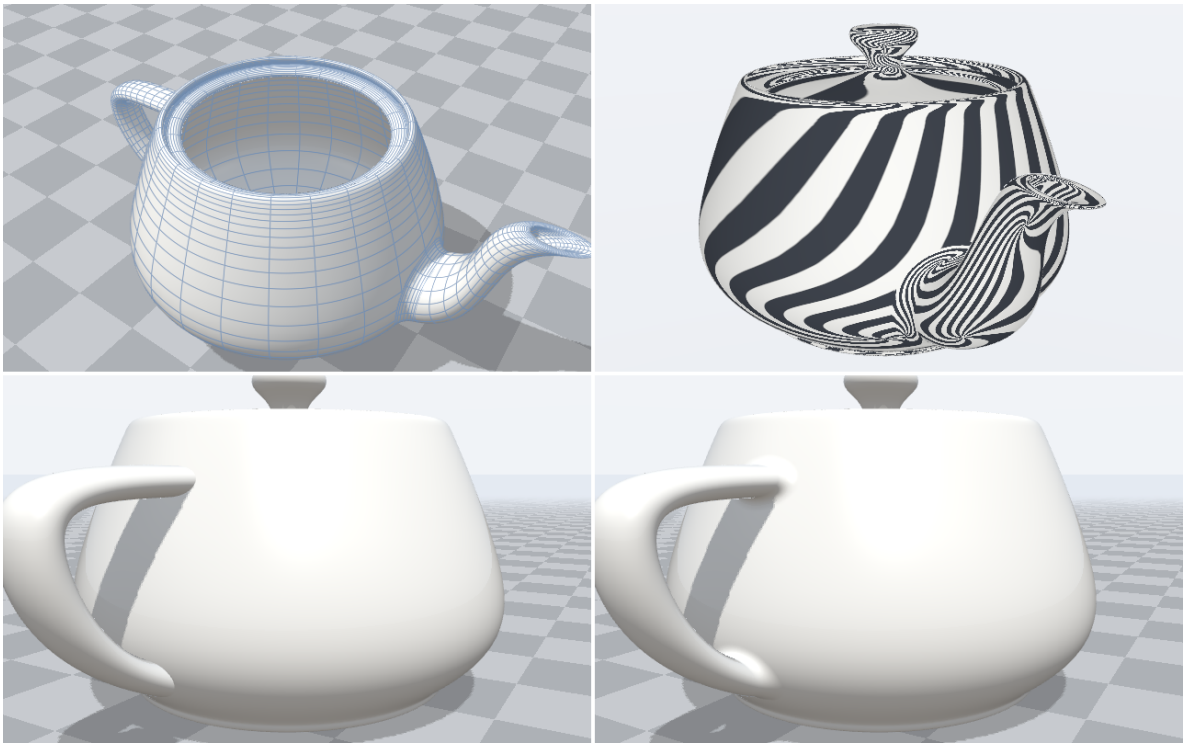


Fig. 2. The 2026 teapot as four sheets with blended joins. Top: the body sheet with the lid removed, its rows gathering at the rim and the foot and continuing down the interior; reflection lines crossing the join at the base of the spout. Bottom: the handle without joins and with them.

TABLE VI
Defects addressed by later versions, and by a CONV lattice

Defect of the 1976 patches	Fixed in	CONV lattice
Body not round	1992	Improved: 233 times rounder at the same node count
Kinked knob tip	mesh options	Improved: the kink is removed
No bottom	1987	Flat cap with an exact crease; Crow's round bottom from samples
Curvature jumps at patch joints	2026	Per patch: not reproduced. Unified sheets: mean relative jump 0.003
Handle and spout pierce the body	1992, 2026	Blended joins of our own (Section VII), not the 2026 chamfers
No interior	1992–2026	The 2026 interior, from samples
Gap around the lid	1992	Not addressed
Mesh cracks, duplicate vertices, pole triangles	mesh options	Not applicable: no mesh is made
Texture layout	2026	One chart per part; patch coordinates also offered

A. Roundness

A cubic Bézier arc is not a circle, and the teapot's quarter arcs use a rounded handle length. At its widest ring the original body is out of round by $(r_{\max} - r_{\min})/\bar{r} = 4.1 \times 10^{-3}$. A node lattice needs no new patch type to do better: put the ring's nodes on the circle. A seamless periodic CONV ring through them is not a circle either, but its error falls quickly with the node count (Table VII). With the 16 nodes per turn of the exact lattice it is 233 times rounder than the original, and the body and lid stay within 4.3×10^{-5} of the exactly revolved profile. Because the profile factor is linear in the radius, the profile itself remains exact in this style.

TABLE VII
Out-of-roundness of the body at its widest ring

Surface	$(r_{\max} - r_{\min})/\bar{r}$
Bézier original, and CONV exact	4.1×10^{-3}
CONV round, 12 nodes per turn	9.6×10^{-5}
CONV round, 16 nodes per turn	1.7×10^{-5}
CONV round, 24 nodes per turn	1.6×10^{-6}
CONV round, 32 nodes per turn	2.8×10^{-7}

The same change repairs the knob tip. The original lid ends in a ring of radius 0.01 whose four quarter patches meet at a kink: the tangent around the ring turns by 18.9° a seventh of a node interval below the tip and by more nearer to it. Meshing options exist on the official page for such tips. On the round lattice the ring is a circle and the turn is zero.

B. Curvature continuity

Curvature continuity is the contribution of the 2026 model [6]: where two patches of the original meet with matching tangents but different curvature, a reflection bends. Fig. 3 repeats that test on our lattices. The 1976 lattice, being the 1976 surface, shows the bend at the joint of the upper and lower body. The 2026 lattice shows none at this scale.

The figure does not show what the measurements show. At every joint between two exterior lattices we compared

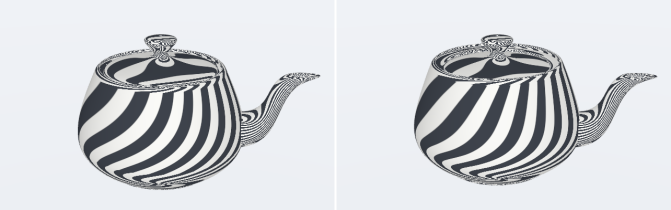


Fig. 3. Reflection lines. Left: the 1976 lattice; the stripes bend where the upper and lower body meet. Right: the 2026 lattice from samples.

the two surfaces' normals and the curvature of the curve that crosses the joint (Table VIII). The sampled 2026 lattices keep the normal to 0.11° on average and 0.83° at worst. They do not keep the curvature: its relative jump across a joint averages 0.16, about what the 1976 patches have by design. The reason is the seam. Each lattice ends with one-sided stencils, whose second derivative is accurate to second order only, so two lattices that sample one G^2 surface still disagree about its curvature at their common edge. Our 2026 teapot therefore has the shape of Yuksel's, to the accuracy below, and approximately its normals, but it is not itself curvature continuous. Lattices that run across the smooth joints without a seam would be, where the limiter is inactive. Section VII builds them, with rows placed by a projective warp, and the mean relative jump falls to 0.003.

TABLE VIII
Across the joints of exterior lattices, 9 by 9 nodes each

	Normal turn (deg)		Curvature jump	
Lattices	mean	max	max	mean rel.
1976, 44 joints	0.06	1.71	2.85	0.19
2026, 52 joints	0.11	0.83	49.4	0.16

The maximum for 1976 is the kink at the knob tip, and the large maximum for 2026 is on the narrow tubes, where curvature itself is large. Accuracy of the sampled shape. We have no finer truth for the 2026 surfaces than the samples, so we hold some out: lattices built from every other sample, 5×5 per patch, predict the omitted samples to 2.1×10^{-3} at worst and 6.6×10^{-4} rms on the exterior (3.7×10^{-3} and 8.0×10^{-4} on the interior), on a body 4.0 wide. The 9×9 lattices have half that spacing and fourth-order ends, so their error should be near a sixteenth of these figures; that is an expectation, not a measurement.

For the 1976 data alone: around the body and lid, the round style has no seams, and one-sided finite differences find no curvature jump across node lines (relative jump below 2×10^{-8}). Along the profile, the exact and round styles copy the original and therefore its curvature jumps: the worst is 2.85 in absolute curvature, at the joint of the rim and the upper body. They are not curvature continuous there, and Yuksel's construction [6] is.

One might hope to obtain continuity by removing the seams along the profile and leaving them only at true creases. We built that variant, with rows graded in arc length so that spacing changes gradually. It is not a success at the node counts of interest. At four intervals per patch it deviates from the original by up to 4.0×10^{-2}, and it is not smooth either: where the tight curl of the rim falls between nodes, admission acts and leaves tangent turns of up to 13° at node rows, and the cap crease is rounded to 47° where it should be 90°. Doubling the nodes brings the deviation to about 2×10^{-2}. A CONV lattice is smooth where its data are resolved and is not where they are not. We recommend the seamed styles.

C. What is not addressed

In the per-patch versions the handle and spout pass through the body. The trimmed and chamfered surfaces of the 1992 to 2026 models are not grids of samples, and we do not reproduce them; the unified version replaces them with joins of its own (Section VII). The 1992 and 2006 versions are not included. In the 1975 to 1987 versions the lid still floats 0.1 above the rim.

D. No mesh

Several options of the official page concern tessellation: duplicate vertices along patch edges, triangles at the tips, matching normals across edges, the direction of triangulation. A node lattice has one node where patches meet, and Section X renders the surface itself. When a mesh is wanted for speed, Section XI makes one from the lattice, with one vertex where pieces meet and two only along a crease. A pole is handled by the solver's damped step and by a normal averaged around the pole a short distance along v.

X. Rays by Transport

A camera ray meets $S(u, v)$ where two scalar equations vanish. The usual method searches for that point from the ray's side [13], [14]: a hierarchy of bounds, then Newton's method. Correspondence transport, introduced for a cloth experiment built on CONV, works from the surface's side. The parameters of a lattice of surface points are known; where those points land on the screen tells nearby pixels where their rays must meet the surface.

A. Method

1) Transport. Evaluate each part on a lattice of k samples per node interval ($k = 4$) and project the points.
2) Predict. Each projected lattice cell, split into two triangles and dilated by 0.6 pixel, gives every pixel centre it covers a candidate (u, v) by barycentric interpolation, with a lower bound on depth. A pixel keeps up to six candidates in depth order. Workers own disjoint bands of rows, so the lists need no locks and their order is deterministic.
3) Correct. In depth order, a pixel refines a candidate on the true surface by Newton's method with the dual-number derivatives, to 0.01 pixel. It stops at the first converged hit that is nearer than the next candidate's bound.

No ray performs a search. The triangles are predictors only; every hit, normal and texture coordinate comes from the surface.

Two refinements carry most of the gain. A prediction whose first residual is under 0.35 pixel takes one exact Newton step and is accepted without a second evaluation, provided the step stays inside one cell and is not long for its residual, which excludes creases and grazing rays; the error of such a step is of second order in the residual. And a solve that fails to halve its residual after two iterations is abandoned; without this, rays that just miss a silhouette cost eight evaluations each and dominate the frame.

B. Comparison

The baseline traces each ray independently through a bounding-volume hierarchy over the same lattice cells, intersects the same two triangles per cell, and corrects with the same solver and the same one-step rule. It is a strong baseline: it differs from transport only in how a ray finds its candidates. Table IX gives medians of 21 frames of the exact teapot on an Apple A18 Pro (six cores), Apple clang 21 at -O3 without contraction. The machine was shared during the measurements (load average near 6), so the absolute times are indicative and the ratios are the result.

TABLE IX
Frame time (ms), one sample per pixel

Frame	Threads	Transport	Per ray	Ratio
640×400	all	17.4	29.1	1.67
640×400	one	48.4	87.4	1.81
960×600	all	30.3	59.6	1.97
960×600	one	90.9	221.4	2.44

The mechanism is visible in the counters. At 960×600 transport starts 1.09 solves and makes 1.34 surface evaluations per surface pixel; the per-ray tracer starts 1.90 and makes 2.10, and visits 8.5 hierarchy nodes per ray besides. Transport pays 4.8 ms to predict and 4.7 ms to transport the lattice and build the shadow map. A repeat of the last row gave 183 ms for the per-ray tracer, so that ratio should be read as about two.

Agreement. For the 960×600 frame we re-evaluated every reported (u, v): the worst reprojection error is 0.20 pixel and the mean 5×10^{-4} pixel. Against a per-ray reference with a lattice four times finer and no one-step rule, transport agrees on 98,347 of 98,462 surface pixels (99.88%) and the per-ray tracer on 98,349. Nearly all the differences lie on silhouettes and crease edges, where a ray grazes two roots less than a pixel apart and neither method is certain to return the nearer. Neither proves that every intersection has been found.

C. Edges, floor, and gloss

Edges. One sample per pixel leaves stair-stepped silhouettes. A pixel whose neighbour shows another part, another sheet or no surface receives four more samples on a rotated grid, which reuse the pixel's own predictions. About 2% of pixels qualify, but their rays are the expensive ones, and the frame costs about twice as much: 40.0 ms against 50.4 ms per ray at 640×400 on all threads.

Floor. The view reflected in a planar floor is the view from the eye mirrored in that plane, an identity used for planar mirrors in an earlier photonic transport experiment. Its rays are as coherent as the camera's, so the reflection is one more transport pass from the mirrored eye over the same lattice.

More surfaces. The 2026 version has 66 lattices and 5346 nodes, with interior sheets behind most exterior pixels. A 640×400 frame of it takes 38.6 ms by transport and 55.8 ms per ray without edge samples, and 61.1 ms and 80.3 ms with them.

Gloss. A ray reflected by the curved teapot is not coherent with its neighbours, and transport has nothing to offer it; those rays go through the per-ray tracer, one bounce. The emitter is a rectangle seen along the reflected ray, so a highlight has the shape of a window and not of a point light's lobe. With gloss and a polished floor a 640×400 frame takes 72.9 ms by transport and 96.7 ms per ray, edge samples included.

Wireframe and texture. A hit carries its own (u, v) and their screen gradients, so node lines and patch outlines are drawn in the shader with hidden lines removed for free, and they are curves on the surface, not a cage around it. Textures are small RGB lattices reconstructed by the same CONV evaluator, mapped per part or per patch as on the 1976 journal cover [2].

Fig. 4 shows four renderings and Fig. 5 the solver work per pixel.

XI. Baked Vertices

Tracing evaluates the surface at every pixel. Baking evaluates it once, at vertices placed so that flat triangles between them stay close to it, and from then on a frame costs no evaluation.

A. Where to put the vertices

We tried five layouts on the unified teapot and measured each mesh against its four sheets at seven points in every triangle: the distance from the flat triangle to the nearest point of the surface, found by sliding along the surface from the point with the same parameters and never across a crease, and the angle between the interpolated vertex normal and the surface's normal there. The join bands are left out of the measure: the interior spout join folds on itself, a fault of that join which would be charged to whichever layout met it.

Uniform: every lattice cell cut k by k. Bounds: a tensor grid in which each column and row of cells is cut as often as the lattice data alone require. A chord over a step h of a curve with second derivative at most M strays by at most $Mh^2/8$, and the second difference of the nodes is M in node units, so a cell needs $\sqrt{M/8\varepsilon}$ cuts; no surface evaluation decides it. Tree: every cell is halved, along u, along v or both, until the surface at the middle of each edge

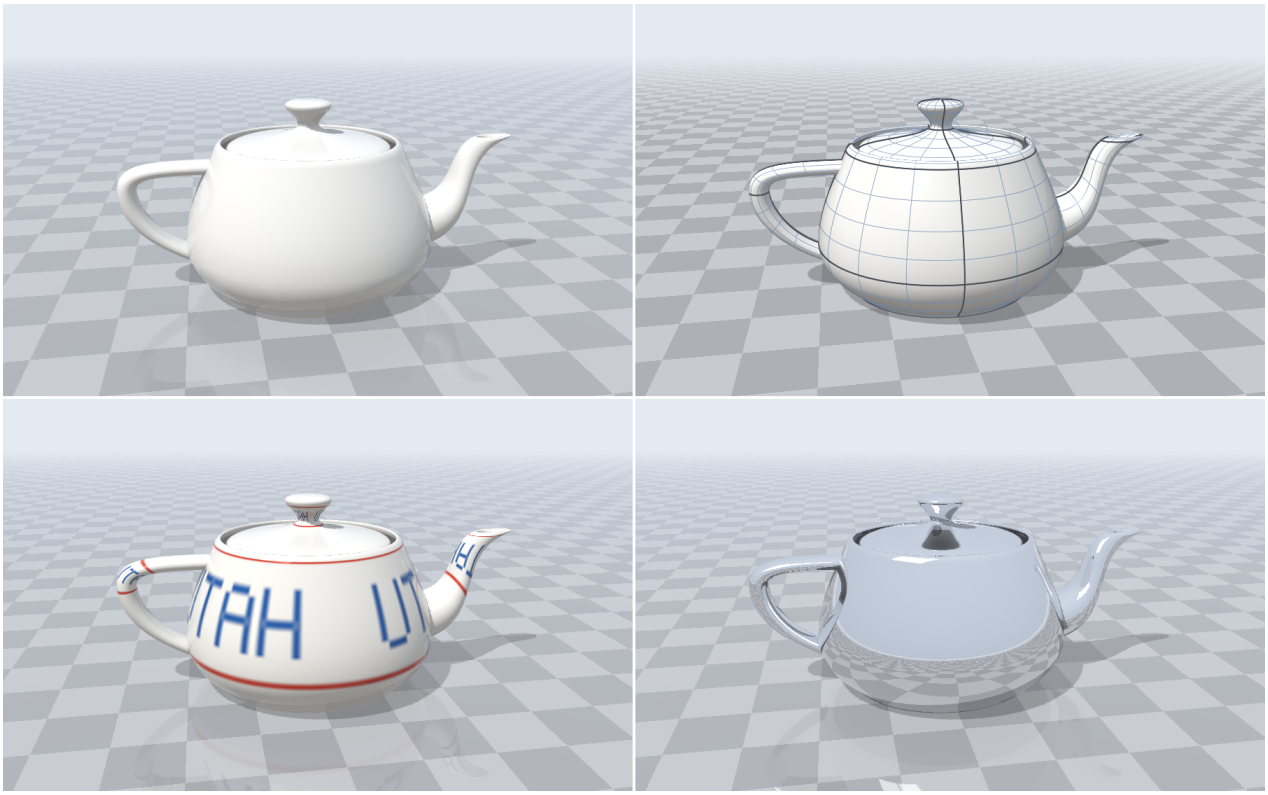


Fig. 4. The CONV teapot, exact style, 560 nodes, traced by transport. Top: porcelain with gloss on a polished floor; node lines (thin) and the original patch outlines (heavy) drawn from the hit parameters. Bottom: a low-resolution texture magnified by CONV under a traced glaze; chrome, reflecting the floor and its own handle and spout.

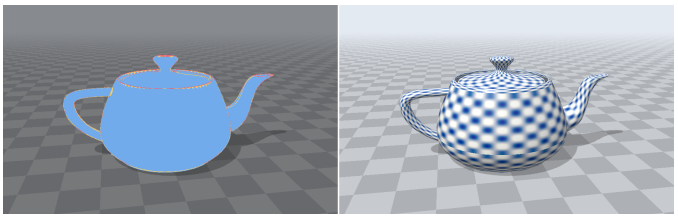


Fig. 5. Left: solver work. Blue pixels needed one solve, orange two, red more. Right: a checker mapped in patch coordinates.

TABLE X
Vertex layouts on the unified teapot (3104 nodes). Distance in model units; a pixel at the teapot is about 0.011

Layout	Vertices	Distance max	Distance rms	Normal (deg) max	Normal (deg) rms
Uniform 2×2	12786	1.9×10^{-2}	5.1×10^{-3}	39	3.15
Uniform 4×4	49430	4.7×10^{-3}	1.3×10^{-3}	9.4	0.80
Bounds, 10^{-2}	7351	1.4×10^{-2}	3.5×10^{-3}	51	2.21
Bounds, 5×10^{-3}	11060	6.4×10^{-3}	2.2×10^{-3}	51	1.70
Tree, 10^{-2}	10506	9.1×10^{-3}	2.0×10^{-3}	75	1.78
Tree, 2×10^{-2}, 20°	8991	1.5×10^{-2}	4.5×10^{-3}	25	3.86
Tree, 10^{-2}, 20°	14189	9.0×10^{-3}	1.7×10^{-3}	23	1.79
Tree, 5×10^{-3}, 10°	29498	3.9×10^{-3}	1.1×10^{-3}	7.1	1.15
Clusters, 12000	11984	3.7×10^{-2}	1.8×10^{-3}	117	6.58
From the metric: (a) 2×10^{-2}, 20°; (b) 10^{-2}, 20°; (c) 5×10^{-3}, 10°					
(a) nucleated, unchecked	2869	1.6×10^{-1}	8.6×10^{-3}	77	8.61
(b) nucleated	5586	1.9×10^{-2}	4.2×10^{-3}	11	2.69
(b) lattice nodes	6749	1.9×10^{-2}	5.3×10^{-3}	9.9	2.41
(c) nucleated	14144	2.3×10^{-2}	1.7×10^{-3}	58	1.31
(c) lattice nodes	12464	1.0×10^{-2}	2.6×10^{-3}	5.4	1.31

and of the cell is within ε of the flat piece, and optionally until the normal turns no more than a set angle along an edge. Neighbours of different depth are joined without cracks by triangulating each piece as a fan that takes in every vertex its neighbours left on its border. Clusters: k-means over dense surface samples in position and normal, run with the mini-batch moving-average updates of e-means [12], each cluster giving its most central sample as a vertex and the dual of the clusters on the sample grid as triangles. The fifth, a family of layouts from the curvature metric, has a subsection of its own below.

Of the first four layouts (Table X; the full sweep is in results/mesh_study.txt; the layouts from the metric are the subsection after next) there are three results. First, distance alone is an insufficient criterion. A bend of radius 0.03 fits inside a tolerance of 0.01 as a single flat piece turning 60°, and the shading across it is then wrong however the normals are interpolated: the tree by distance alone has a worst normal error of 75°, and a 20° limit on the turn of the normal along an edge brings that to 23° for a third more vertices. Second, the lattice data do bound vertex placement, and cheaply: the bounds layout

holds a distance about as well per vertex as the tree, in half the time and a quarter of the evaluations, but being a tensor grid it cannot follow the bends locally and its worst normal stays at 51°. Third, clustering by nearest centre in position and normal is not competitive: worse on every measure but one, a hundred times slower to build, and its dual triangulation can fold. The uniform 4×4 mesh is the most faithful of the fixed layouts and costs three and a half times the tree's vertices. The picture itself stops improving near 10 000 vertices: against the traced frame, about 500 of 99 000 surface pixels differ in coverage for every layout past that size. The engine's default is the tree with $\varepsilon = 10^{-2}$ and 20°: 14 189 vertices and 26 538 triangles from 49 972 evaluations in 33 ms. A node on a crease becomes two vertices, one per side, each with its side's normal.

B. What sets the count

The problem is a classical one, the best piecewise-linear approximation of a smooth surface, and for flat triangles through points of the surface its answer is known in the limit of many triangles. Locally the surface is $z = \frac{1}{2}(\kappa_1 x^2 + \kappa_2 y^2)$; stretching x and y by $\sqrt{\kappa_1}$ and $\sqrt{\kappa_2}$ makes it a paraboloid of revolution, on which the best triangle is equilateral and errs by half the square of its circumradius. Undoing the stretch, a largest distance ε needs

$$T_\varepsilon = \frac{2}{3\sqrt{3}} \frac{1}{\varepsilon} \int \sqrt{|K|}\, dA \tag{8}$$

triangles, K the Gaussian curvature, each stretched by $\sqrt{\kappa_1/\kappa_2}$ along the direction of least curvature; and a normal that turns by at most α along any edge needs

$$T_\alpha = \frac{4}{\sqrt{3}} \frac{1}{\alpha^2} \int |K|\, dA. \tag{9}$$

Position costs the root of the curvature and smoothness the curvature itself, with different powers of the tolerance. Both integrals can be read from the lattice alone: the five-sample differences that CONV already forms for its jets give the first and second fundamental forms at every node, and from the nodes of the unified teapot $\int \sqrt{|K|}\, dA = 76.4$ and $\int |K|\, dA = 168.5$, against 76.6 and 167.1 from differences of the evaluated surface. The typical ratio κ_1/κ_2 is 15 on the body. By these formulas a distance of 0.02 needs about 740 vertices and a 20° turn about 3200 triangles, where the tree uses 9000 vertices and 26 500 triangles: an order of magnitude, in the limit.

C. Layouts from the metric

To see how much of that can be had, we built the layout the formulas describe. From the nodes, with I, II and $\mathrm{III} = \mathrm{II}\,\mathrm{I}^{-1}\mathrm{II}$ the three fundamental forms in (u, v),

$$M = \frac{|\mathrm{II}|}{8\varepsilon} + \frac{\mathrm{III}}{\alpha^2} + \frac{\mathrm{I}}{L^2} \tag{10}$$

measures a step in units of one allowed edge: its chord strays by ε, or its normal turns by α, or it is L long. Seeds are placed; their cells are grown over a grid of samples by shortest paths in M, so each is one connected piece; the seeds may then be moved toward the means of their cells with the moving-average updates of e-means [12]; and the triangles are the dual of the cells. Creases, ends and poles are pinned rows with seeds of their own. Three ways of placing the seeds were tried: at random; nucleated, one at a time, each where the surface is furthest in M from every seed so far; and at the lattice nodes themselves, whose rows CONV's own error has already crowded where the shape is hard.

Unchecked, the nucleated mesh has the predicted count and is wrong in places by 0.16 (Table X). Two things that the metric does not contain account for it. A pinned row is a curve in its own right: a chord of the rim strays by the circle's sag whatever the surface's normal curvature along it, so such rows must be sized by the curve's own curvature. And where one principal curvature vanishes, on top of the lip or on a nearly flat disc, the metric calls an edge along that direction free, but a straight chord leaves the line of zero curvature sideways, into surface that bends sharply. That is a third-order effect, absent from the metric. So every triangle is tried against the surface at its middle and the middles of its edges, and one that fails gets a seed where it fails worst.

Checked in this way, nucleated seeds reach the quality of the tree with $\varepsilon = 2 \times 10^{-2}$ and 20° from 5586 vertices in place of 8991, and have no advantage left at 14 000, where a few triangles also remain out of tolerance because the refinement did not converge. To pass the check at the coarse setting nucleated seeds needed 5354 vertices, random ones 6174 and lattice nodes 6550; moving averages brought the random start to 5626 and did nothing for the other two. The lattice nodes give the most uniform result: no triangle is far out of tolerance at either setting, and at the fine one they give a worst normal error of 5.4° from 12 464 vertices, which the tree does not reach with 29 498. Their distance is the weaker side, and the traced picture is still slightly closer to the tree's. Restricting each cell to the lattice cells round its node, and an inserted seed to the lattice cell it lies in, changes the count by 3% and the errors not at all: the metric cells of node seeds already coincide with the lattice cells. The restriction makes each lattice cell independent of the others, so it can be meshed alone. All of these cost about a second and a million evaluations to build, against 30 ms and 50 000. The gain is well below the asymptotic limit. Creases, poles and lines of zero curvature, where the limit's assumptions fail, cover much of the teapot. The engine uses the tree.

D. Rasterizer

The mesh is drawn on the CPU. Edge functions are integers with eight bits below the pixel and a top-left fill rule, so triangles that share an edge neither overlap nor leave a gap; depth is $1/z$, which is affine on the screen; triangles are filed by bands of rows, which threads share out. The rasterizer writes only a visibility buffer, a triangle and two weights per sample at two by two samples per

pixel, and shading follows once per pixel, or once per sample where a pixel's samples show different parts or depths. The techniques are those of the software rasterizer in PlaySuite's fish tank; the code is our own.

E. Light painted by the ray tracer

Each part has a light map in its own chart: around the part one way, arc length along it the other, so texels are spread evenly over the surface however its rows are graded. To bake, every texel is shaded exactly as the ray tracer shades a hit at that point seen from the camera, with its shadow, texture and traced reflection, and stored with a chain of half-size levels; a texel facing away from the camera is shaded for the mirrored view direction, so the far side holds its own outward lighting. A frame then reads the map between the two levels that match each triangle's size on screen. 601 808 texels of 0.016 units bake in about 130 ms.

F. Reflections from emitters

A light map baked whole freezes whatever depends on the view: turn the camera and the highlights and the floor's reflection stay painted where they were (Fig. 6, right). So the map keeps only what does not depend on the view, the diffuse light and the lit fraction, and the rest is added at every frame. Each pixel has an interpolated normal, hence a mirror direction, and that direction is answered by emitters and not by tracing. Above the horizon it is the sky and its window. Below, it is a stand-in for the floor: an object that is never drawn, whose pattern is the floor's in closed form at the point the mirror ray reaches, and whose shadow was baked once into a small texture with the exact shadow edges described below. The drawn floor and the emitter are separate things that agree. The result follows the camera at the cost of a few arithmetic operations per pixel: 11 ms for a 960×600 chrome frame against 141 ms traced (34 against 483 on one thread). The emitters do not include the teapot itself, so the knob is not reflected in the lid nor the handle in the body. Those reflections require tracing.

G. The mesh as a seed

The mesh also serves the ray tracer. Each visible sample names a triangle and weights, hence a parameter pair within the mesh's tolerance of where the ray meets the surface, and one Newton solve from there lands on the surface itself. Transport gathers up to six predictions per pixel and solves several; a seeded ray solves one. Where the mesh catches a ray that the surface does not, which happens within the tolerance of a silhouette, the mesh's own point is shown.

TABLE XI
One 960×600 frame of the unified teapot, medians of 9

Method	Time (ms), threads all	Time (ms), threads one	Evaluations per pixel
Per ray, hierarchy	150	410	4.1
Transport	91	261	3.8
Seeded by the mesh	37	125	2.0
Mesh, shaded per pixel	15	45	0.16
Mesh, baked light, emitters	11	36	0.08

The evaluations left in the last two rows of Table XI, and 0.6 of those in the row above, are shadow rays (next subsection). In a browser, on one thread in WebAssembly, the same frame takes about 450 ms by transport, 200 ms seeded and 40 ms from the mesh with baked light; traced chrome takes 750 ms there and the mesh with emitters 50.

H. Shadow edges on the surface

Shadows are looked up in a depth image drawn from the light. Its texels are larger than a pixel, and a shadow's edge followed them in stair-steps. Blending the lookup only rounds the steps. The edge belongs to the surface, so that is where we now find it: each depth texel also records which part it saw and where, and at a point whose surrounding texels disagree the light ray is traced by Newton from those records, two rays on a rotated grid inside the pixel and two more if they differ. A texel that saw the receiving surface's own neighbourhood is not counted as disagreement, which keeps the wide band of doubt along a terminator from being traced. The edge is then as sharp as the surface makes it at any zoom, for 0.1 to 0.6 evaluations per surface pixel.

XII. Motion

Since every node is a surface point, the collision shape of the teapot can be taken from the lattice with no separate model: the convex hull of a group of nodes is a convex piece of the teapot. For the 1975 to 1987 versions we use eleven hulls, one for the body, two for the lid, and four each along the handle and spout; for the 2026 version, one hull per group of exterior lattices. We hand them to the rigid-body engine of a rock-stacking game, whose wrench-transport solver resolves contact, friction and rolling resistance in one solve per frame. One model unit is taken as 7 cm. The engine returns a pose. The lattice stays at rest and the pose is applied to the surface: every evaluated point and derivative is turned and shifted. An earlier version applied the pose to the nodes and built CONV through the moved nodes. That is a different surface. Admission and the bubble act on each coordinate separately, so they do not commute with a rotation, and a monotone coordinate of the lattice at rest need not be monotone after a turn. Table XII measures the difference for a turn about one axis: none at 90°, where the coordinates are only exchanged, and otherwise up to 1.3×10^{-2} in position and 62° in the normal for the 1976 lattice. The moved-node surface shows thin creases under grazing light that the lattice at rest does not have. The same holds for any rigid

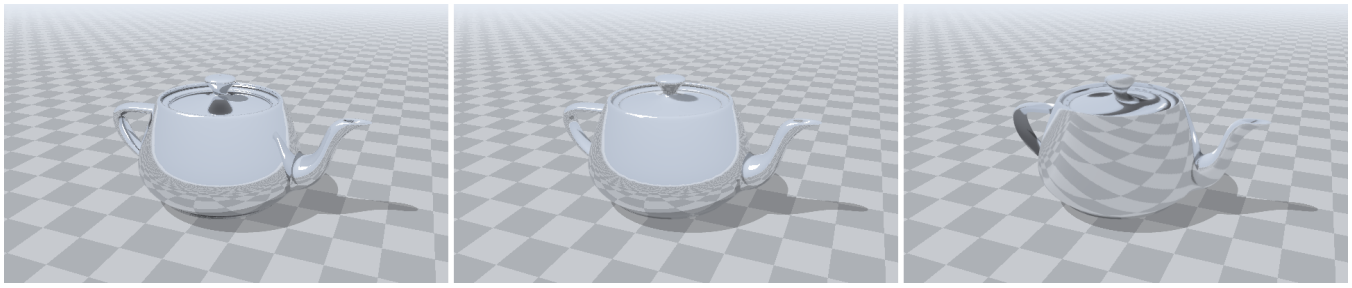


Fig. 6. Chrome. Left: traced, one bounce. Middle: the baked mesh, its reflections taken per frame from emitters, the sky above and a stand-in floor below; only the teapot's reflection of itself is missing. Right: the same mesh with reflections baked from another viewpoint and left there.

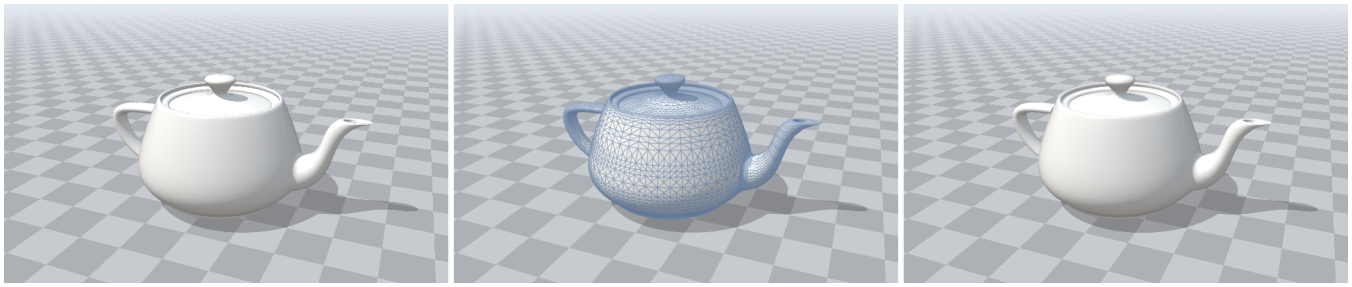


Fig. 7. Left: traced by transport. Middle: the baked mesh, 14 189 vertices, with its triangles drawn. Right: the same mesh lit from the light map painted by the ray tracer.

motion of a CONV surface whose admission is not inactive in every frame.

TABLE XII
CONV through turned nodes against the turned CONV surface

		Distance		Normal (deg)	
Version	Turn	max	rms	max	rms
1976, exact	30°	1.3×10^{-2}	1.0×10^{-3}	62	1.91
1976, exact	60°	1.2×10^{-2}	8.4×10^{-4}	62	1.90
1976, exact	90°	1.3×10^{-15}	1.3×10^{-16}	0	0
2026, unified	30°	1.2×10^{-3}	3.3×10^{-5}	26	0.54
2026, unified	60°	1.0×10^{-3}	2.7×10^{-5}	23	0.40
2026, unified	90°	1.3×10^{-15}	1.1×10^{-16}	0	0

Dropped from 42 cm at a tilt of 1.2 rad, the teapot lands on its spout, rocks back over its base and is asleep within 1.5 s (Fig. 8). The body is treated as solid porcelain. A real teapot is a shell; simulating one would use the interior, which these versions lack.

Taking hold of the teapot is a pin at the point that was picked: a critically damped spring of 8 Hz between that point of the body and the pointer, applied as an implicit impulse at the point each engine frame, with the engine's contacts solved after it. Lifted by its handle the teapot turns through 90° and hangs from the handle, its centre below the hand; it is not carried level by its centre of mass.

XIII. Limits

The variation bound is factorwise and coordinatewise; it does not bound the curvature of the surface or forbid self-intersection. Exact reproduction is a statement about a rest pose whose admission is inactive; a deformed lattice is a CONV surface through the moved nodes, not a deformed Bézier surface. The surface is continuous within a part and only there. Transport and the per-ray tracer both accept a converged root without proving it the nearest, and both use lattice triangles as predictors, so a feature thinner than a lattice cell on screen can be missed. The hierarchy's boxes are padded by a fraction of their diagonal, which is a heuristic and not an enclosure. Timings are of one implementation on one shared machine, and vary by a quarter between sessions. The baked mesh is flat between its vertices: its silhouette is the surface's only to the tolerance it was baked at, a light map holds the diffuse light of one pose, and the emitters that answer its mirror directions do not include the teapot itself. The vertex-count limits quoted are asymptotic and assume elliptic points; their constants are derived here for a paraboloid. The node-count comparison covers surfaces that suit a lattice; it does not cover shapes of arbitrary topology, which subdivision surfaces handle.

XIV. Conclusion

A CONV lattice with seams reproduces the 1976 Utah Teapot exactly from 560 points that lie on it. The lattice can be made round by moving nodes onto circles, traced without a mesh, textured in its own parameters, and dropped on a floor by handing its nodes to a physics engine as collision hulls and applying the resulting pose to the surface. Later versions enter as samples, with no knowledge of how they were constructed: the 2026 teapot, interior included, is 66 small lattices. Across their seams those lattices do not carry curvature continuity. Whole sheets reduce the curvature jump from 0.16 to 0.003: the

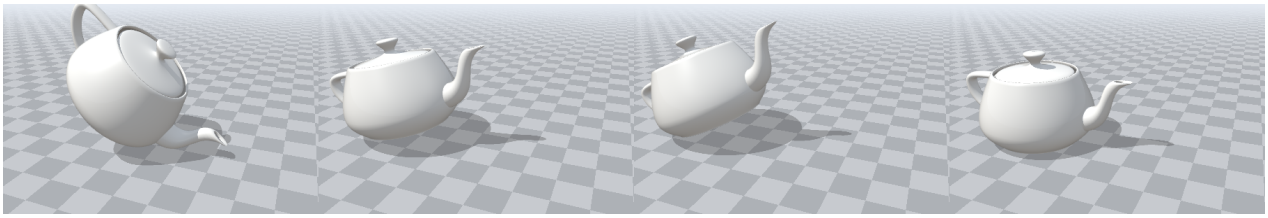


Fig. 8. A drop, at 0.30, 0.42, 0.60 and 1.60 s. The surface is drawn from its lattice at rest, carried by the body's pose.

body with its interior is one lattice, the lid another, with rows placed by a projective warp, and the handle and spout meet the body in joins that are blends of the two surfaces. With rows placed by CONV's own error the whole teapot is 3104 nodes, and on targets native to no method a CONV lattice needs as few nodes as the globally solved C^2 spline while reading only the nodes around a cell. When speed matters more than exactness the lattice bakes to a mesh whose vertices its own error places, lit by a texture the ray tracer paints, at a tenth of the cost of tracing. Unfinished: a residue of curvature jump where rows are coarse, a rough interior join, and joins that differ from the chamfers Yuksel designed.

Attribution

The Utah Teapot was created by Martin Newell at the University of Utah and scaled by Jim Blinn; the 1987 bottom is Frank Crow's and the 2026 version is Cem Yuksel's. The models built here are Modified Utah Teapots in the sense of the terms on the official page [5]: the 1976 surface re-expressed, with an optional flat cap; and surfaces of the 1987 and 2026 versions rebuilt from points sampled with that page's mesh generator, without trimming or chamfers.

AI Generated Work Disclaimer

Substantial portions of this work were generated with the assistance of Anthropic Claude models.

References

[1] M. E. Newell, "The utilization of procedure models in digital image synthesis," Ph.D. dissertation, Univ. of Utah, Salt Lake City, UT, USA, 1975.

[2] J. F. Blinn and M. E. Newell, "Texture and reflection in computer generated images," Commun. ACM, vol. 19, no. 10, pp. 542–547, Oct. 1976.

[3] F. Crow, "The origins of the teapot," IEEE Comput. Graph. Appl., vol. 7, no. 1, Jan. 1987.

[4] J. F. Blinn, "What, teapots again?" IEEE Comput. Graph. Appl., vol. 7, no. 9, Sep. 1987.

[5] "The Utah Teapot," Univ. of Utah. https://graphics.cs.utah.edu/teapot/ (accessed Nov. 11, 2026).

[6] C. Yuksel, "Continuity-enhancing degree elevation and splits," in Proc. SIGGRAPH, 2026, as cited on [5].

[7] "Utah Model Repository: Original Bezier Teapot," Univ. of Utah. https://users.cs.utah.edu/~dejohnso/models/teapot.html (accessed Nov. 11, 2026).

[8] "Compact Ordered Nodal Variation," 2026. https://github.com/malkuth-software/papers.

[9] C. de Boor, "Good approximation by splines with variable knots," in Spline Functions and Approximation Theory, Birkhäuser, 1973.

[10] E. Catmull and R. Rom, "A class of local interpolating splines," in Computer Aided Geometric Design, Academic Press, 1974.

[11] E. Catmull and J. Clark, "Recursively generated B-spline surfaces on arbitrary topological meshes," Computer-Aided Design, vol. 10, no. 6, 1978.

[12] S. Bessa, P.-E. Mazaré, G. Szilvasy, H. Touvron, D. Picard, M. Douze and H. Jégou, "e-means: outperforming k-means (in one-tenth the epochs)," arXiv:2611.09501, 2026.

[13] J. T. Kajiya, "Ray tracing parametric patches," in Proc. SIGGRAPH, 1982, pp. 245–254.

[14] D. L. Toth, "On ray tracing parametric surfaces," in Proc. SIGGRAPH, 1985, pp. 171–179.